DIVERSIFIED AIR SYSTEMS, INC.

# \*\*FLO-FB

## Portable Fume/Paint Booth

- Ships fully assembled, 48" wide x 24" deep work surface
- Plug and play unit, total self-contained downdraft booth
- Dust tight florescent light mounted out of air stream




- Recirculates clean air, which eliminates the need for expensive exhaust
- Motor and electrical mounted out of air stream with plastic blower wheel
- High efficiency media filters with a refillable adsorption module

Superior technology generating substantial operating savings

#### MAXFLO PORTABLE FUME/PAINT BOOTH

Diversified Air Systems, Inc. now offers an easy to use portable fume/paint booth. The MAXFLO-FB is a totally self-contained portable filtration unit. Standard filtration consist of multiple pass polyester pre-filters followed by a MERV 14 (95% at 1 micron) box filter with final refillable charcoal module. Separate access door allows for easy access to filters. The motor is mounted out of the air stream with direct drive non-sparking blower wheel. Florescent light, on/off switch and wiring are all located out of the airstream. Just roll the unit to your job, plug it in and turn it on.

#### **OUTSTANDING STANDARD MAXFLO FUME BOOTH FEATURES**

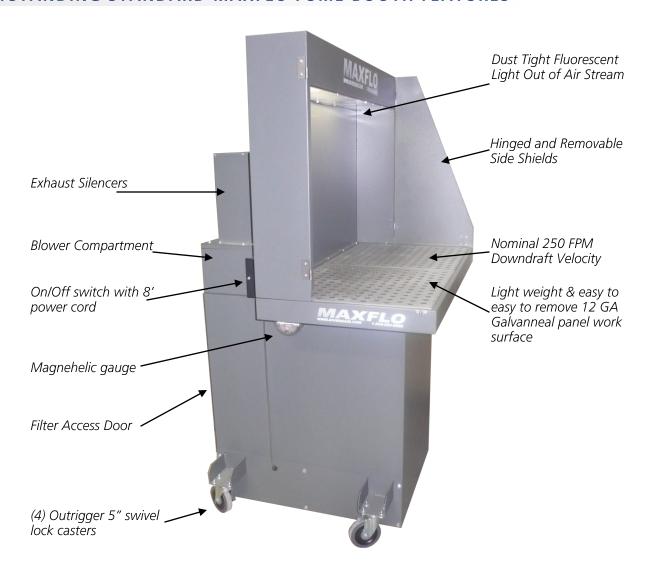


#### TYPICAL APPLICATIONS FOR THE MAXFLO PORTABLE FUME/PAINT BOOTH


• Spray Painting • Solvent Fumes/Mist • Dust • Fumes • Laboratories • Powders • Blow Off Station, etc...

Made in USA
1 YEAR LIMITED WARRANTY

CALL TODAY: 800-264-8958

#### **OUTSTANDING MAXFLO FB SERIES FEATURES**

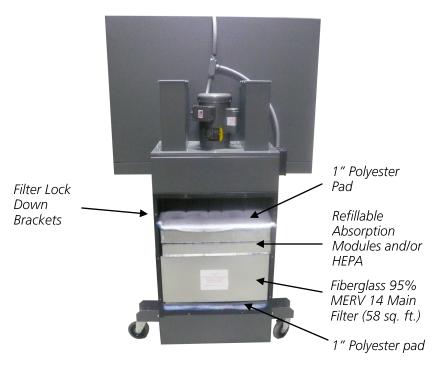

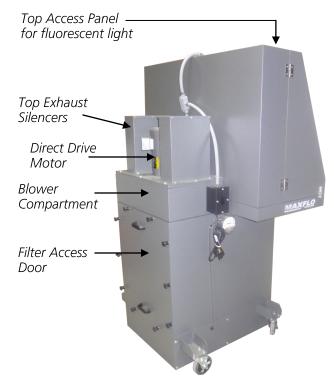

#### **SPECIFICATIONS**

Dimensions: 48" W x 39" D x 74" H

Working Table Height: 41"

Working Surface: 48" Width x 24" Depth

Electrical: 1.5 HP Motor, 120/1/60

Direct Drive Motor with Plastic Blower Wheel

Motor Mounted Out of Airstream

CFM: 1900 CFM Nominal

Downdraft Velocity: 250 FPM Nominal

Weight: 500 lbs.

Max Table Load: 300 PSF Noise: 73 DBA Nominal

Construction: 14 Gauge Cabinet Color: Powder Coated Gray

### **OPTIONAL FEATURES**

- Exhaust Dampers
- Variable Frequency Drives
- Small Enclosure 30" wide x 24" deep
- HEPA Filtration
- 1 HP motor 1000 CFM Nominal
- Modular 1' Table Extension

## MAXFLO-FB STANDARD FILTER ARRANGEMENT

- (1) 1" Polyester Pad Prefilter
- (1) 95% @ 1 Micron (MERV 14) Fiberglass
   Box Filter, 58 sq. ft.
- (2) Adsorption Modules, 26 lbs. each
   Refillable, 6" Total Bed Depth, 100% Fill,
   52 lbs. Activated Carbon Included
- (1) 1" Polyester Pad After Filter

Note: Specifications listed above may be modified to suit application. contact D.A.S. or representative for information.

## Diversified Air Systems, Inc.

10801 Electron Drive, Louisville, Kentucky 40299

Toll free: (800) 264-8958

Tel.: (502) 267-0333 • Fax: (502) 267-4241

Website: www.diversair.com • email: info@diversair.com